

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
20 October 2005 (20.10.2005)


PCT

(10) International Publication Number
WO 2005/099210 A1

- (51) International Patent Classification⁷: **H04L 27/26**, 1/06, 5/02
- (21) International Application Number: PCT/US2005/010136
- (22) International Filing Date: 25 March 2005 (25.03.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
10/814,853 30 March 2004 (30.03.2004) US
- (71) Applicant (for all designated States except US): **INTEL CORPORATION** [US/US]; 2200 Mission College Boulevard, Santa Clara, CA 95052 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **LI, Qinghua** [CN/US]; 4314 East Valley Avenue, Pleasanton, CA 94566 (US). **LIN, Xintian** [US/US]; 111 Rengstorff Avenue, #28, Mountain View, CA 94043 (US).
- (74) Agents: **STEFFEY, Charles, E.** et al.; Schwegman, Lundberg, Woessner & Kluth, P.A., P.O. Box 2938, Minneapolis, MN 55402 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AI., AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: APPARATUS, SYSTEMS, AND METHODS FOR THE RECEPTION OF A PLURALITY OF ASYNCHRONOUS DATA STREAMS

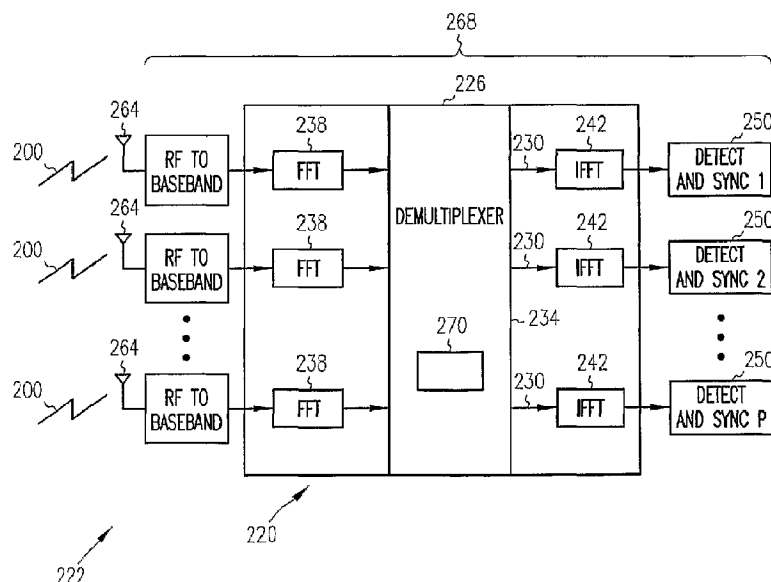

(57) Abstract: An apparatus and a system, as well as a method and article, may operate to separate, in the frequency domain, a combined plurality of asynchronous data streams received at substantially the same time into a separated plurality of data streams, converting to the time domain for detection, synchronizing, and decoding.

WO 2005/099210 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

APPARATUS, SYSTEMS, AND METHODS FOR THE RECEPTION OF A PLURALITY OF
ASYNCHRONOUS DATA STREAMS

Technical Field

[0001] Various embodiments described herein relate to digital communications
5 generally.

Background Information

[0002] In some spatial-division multiple-access (SDMA) communications systems,
10 the SDMA uplinks may be assumed to be synchronous, such that symbols arriving from
different data streams align according to timing boundaries. However, the potential 4
microsecond symbol timing error permitted by some Institute of Electrical and Electronics
Engineers (IEEE) 802.11 standards is longer than the 0.8 microsecond guard interval
specified in the 802.11a standard. Therefore, SDMA uplink communications conducted
15 under these conditions may actually be asynchronous, and, not synchronous as assumed.
Similar problems may occur when SDMA radios conforming to IEEE 802.16 standards
are used.

[0003] For more information regarding various IEEE 802.11 standards, please
refer to "IEEE Standards for Information Technology -- Telecommunications and
20 Information Exchange between Systems -- Local and Metropolitan Area Network --
Specific Requirements -- Part 11: Wireless LAN Medium Access Control (MAC) and
Physical Layer (PHY), ISO/IEC 8802-11: 1999" and related amendments. For more
information regarding IEEE 802.16 standards, please refer to "IEEE Standard for Local
and Metropolitan Area Networks -- Part 16: Air Interface for Fixed Broadband Wireless
25 Access Systems, IEEE 802.16-2001", as well as related amendments and standards,
including "Medium Access Control Modifications and Additional Physical Layer
Specifications for 2-11 GHz, IEEE 802.16a-2003".

Brief Description of the Drawings

30 [0004] FIGs. 1A and 1B are exemplary representations of asynchronous data
streams according to some embodiments;

[0005] FIG. 2 is a block diagram of an apparatus and a system according to various
embodiments;

[0006] FIG. 3 is a flow chart illustrating several methods according to various embodiments; and

[0007] FIG. 4 is a block diagram of an article according to various embodiments.

5

Detailed Description

[0008] In some embodiments, a combined plurality of asynchronous data streams may be received as an SDMA communication signal in the time domain. The received signal may be converted from the time domain into the frequency domain, and then separated in the frequency domain to provide a separated plurality of data streams. In
10 some embodiments, a spatial demapper operating in the frequency domain (e.g., a “frequency spatial demapper” included in a separation module) may be used to assist in separating the combined asynchronous data streams into the separated plurality of data streams.

[0009] Conventional spatial demappers are designed to operate in situations where
15 transmitted signals from various users arrive synchronously at the receiving antenna(s). Thus, when signals arrive asynchronously, receivers including conventional demappers tend to malfunction. This is because separating asynchronous user signals in the time domain is a complex task, while separation in frequency domain, accomplished using the apparatus, systems, and methods disclosed herein, is relatively easy. Thus, the frequency
20 spatial demapper included in some embodiments may operate in the frequency domain, and its output may be converted back into the time domain.

[0010] For the purposes of this document, “asynchronous data streams” include any two or more data streams that have individual, time-sequenced segments or symbols wherein at least one of the data streams includes at least some segments/symbols having
25 beginning and/or ending timing boundaries that do not align with similar beginning and/or ending timing boundaries of at least some segments/symbols included in another of the data streams. For example, the symbols may not be aligned due to differences in allowable timing error (e.g., 4 microseconds) versus allowable guard band specifications (e.g., 0.8 microseconds), such that like beginning/ending boundaries are out of
30 synchronism by a time period greater than the allowed guard band time period.

[0011] A “data stream” may include one or more signals including data transmitted by a single user via one or more antennas, perhaps with different phases and delays. The number of antennas used to receive multiple data streams may not be equal to the number

of data streams, and in some embodiments, may be greater than the number of data streams. For the sake of simplification, it will be assumed throughout this disclosure that P data streams arrive asynchronously at Q receive antennas, and that Q is typically greater than P (although in some embodiments Q may be less than or equal to P).

5 [0012] The term “energy conduit” includes any type of device or apparatus that has the capability to transmit and/or receive energy to and/or from space. Examples of such energy conduits include antennas, infra-red transmitters, infra-red receivers, photo-emitters (e.g., light emitting diodes), photo-receptors (e.g., a photocell), and charge-coupled devices, among others.

10 [0013] The term “transceiver” (e.g., a device including a transmitter and a receiver) may be used in place of either “transmitter” or “receiver” throughout this document. Thus, anywhere the term transceiver is used, “transmitter” and/or “receiver” may be substituted.

[0014] FIGs. 1A and 1B are exemplary representations of asynchronous data
15 streams 100 according to some embodiments. In some embodiments, as might occur when one or more SDMA uplink data streams are formatted according to an 802.11 standard, such as the 802.11a standard, there can be two phases of communication: a training phase 102 and a data phase 104. In the training phase 102, an access point (AP) may learn the characteristics of spatial channels 106 associated with each station STA1,
20 STA2, and STA3. In the data phase 104, the AP may poll the stations STA1, STA2, and STA3, and the stations STA1, STA2, and STA3 may respond by sending signals, including asynchronous data streams 100, to the AP at substantially the same time.

[0015] At this point, the AP may be able to exploit channel state information learned during the training phase 102 to separate the stations’ superimposed signals
25 including the asynchronous data streams 100.

[0016] Several factors may require consideration with respect to the cause of data stream 100 asynchronism. Among such causes may be:

- 30 (1) a conflict between the potential segment/symbol allowed timing error (e.g., about 4 microseconds in a IEEE 802.11 wireless local area network (WLAN)) and an allowed guard interval (e.g., about 0.8 microseconds for IEEE 802.11a). Thus the beginnings and ends of symbols 108 sent by the stations STA1, STA2, and STA3 may not be aligned in time. In the

asynchronous case, one orthogonal frequency-division multiplexed (OFDM) symbol may be interfered with by $2*(K-1)$ OFDM symbols from K simultaneously operating stations STA1, STA2, and STA3, whereas the number of interfering symbols may be only (K-1) for the synchronous case (e.g., see FIG. 1A);

(2) the frequency offsets of the stations STA1, STA2, and STA3 may be different. That is, the sub-carriers of the stations STA1, STA2, and STA3 may be offset from some selected nominal frequency point by different amounts (e.g., see FIG. 1B); and

(3) the phase offsets of the stations STA1, STA2, and STA3 during the training phase 102 and data phase 104 may be different.

[0017] In order to more completely understand the techniques disclosed herein, consider how OFDM symbols may be processed with an SDMA SISO (single-input, single-output) connection. Let $\tilde{m}_i, i = 0, \dots, N-1$ be the message to send, where N is the number of OFDM tones. In the time domain, the waveform may be expressed as:

$$m_n = \sum_{i=0}^{N-1} \tilde{m}_i e^{j2\pi f_i \frac{n}{N} T_m}, f_i = \frac{i}{T_m}, n = 0, \dots, N-1. \text{ Here } T_m \text{ represents the message length,}$$

such that in IEEE 802.11a and IEEE 802.11g, $T_m = 3.2\mu s$, and $N=64$.

[0018] To combat the problem of inter-symbol interference (ISI), a cyclic prefix (CP) may be added to the message in the time domain. If the message time is T_m , and the CP time is T_p , the resulting symbol waveform may then be expressed as:

$$x_n = \begin{cases} m_{n+N}, & -p < n < 0 \\ m_n, & 0 \leq n < N \end{cases}, \text{ with } T_p = \frac{p}{N} T_m, \text{ and the}$$

symbol time = $T_m + T_p$. For IEEE 802.11a and IEEE 802.11g, $T_p = 0.8\mu s$.

Symbols may be sent in serial fashion, as shown in FIG. 1A.

[0019] Multi-path interference may result in the superposition of multiple copies of the message, one on top of the other, as seen at a single receiving antenna. This type of received signal may be expressed as:

$$y_n = \sum_{k=0}^{L-1} h_k x_{n-k},$$

where L is the number of taps in channel response h . After discarding the first p samples, y_n may be free of ISI if $L < p$. However, it may still contain multiple copies of itself. If a Fourier transform is performed on the samples y_n , $n=0 \dots N-1$:

$$\begin{aligned} \hat{m}_i &= \frac{1}{N} \sum_{n=0}^{N-1} y_n e^{-j2\pi f_i \frac{n}{N} T_m} \\ &= \frac{1}{N} \sum_{n=0}^{N-1} \sum_{k=0}^{L-1} h_k \sum_{i'=0}^{N-1} \tilde{m}_{i'} e^{j2\pi f_{i'} \frac{n-k}{N} T_m} e^{-j2\pi f_i \frac{n}{N} T_m} \\ &= \left(\sum_{k=0}^{L-1} h_k e^{-j2\pi f_i \frac{k}{N} T_m} \right) \tilde{m}_i \\ &= \tilde{h}_i \tilde{m}_i \end{aligned}$$

and the known channel response \tilde{h}_i may permit estimating the message \tilde{m}_i from the received signal y_n .

[0020] Extending this method to P transmit antennas and Q receive antennas, the expression $\hat{m}_{k,i} = \tilde{h}_{kl,i} \tilde{m}_{l,i}$, $k = 1, \dots, Q$; $l = 1, \dots, P$; $i = 0, \dots, N-1$

10 may hold if the incoming signal streams include aligned (e.g., synchronized) symbols. Sampling of the streams may then be chosen so that no ISI occurs for each stream.

[0021] In reality, an SDMA uplink message may be sent from several different stations having clocks that are not synchronized, and alignment error under IEEE 802.11 may be as great as 4 microseconds (e.g., the length of a complete OFDM symbol). In this case, for example, samples may pick up part of the CP associated with one symbol in a first stream, and part of a different symbol in a second asynchronous stream, introducing ISI and invalidating the relationship

$$\hat{m}_{k,i} = \tilde{h}_{kl,i} \tilde{m}_{l,i}, \quad k = 1, \dots, Q; \quad l = 1, \dots, P; \quad i = 0, \dots, N-1.$$

[0022] It should be noted that even though this relationship may not hold for the message bits, it may be correct for general waveforms. If it is assumed that the n th sample received at the q th antenna is labeled $y_{q,n}$, then

$$y_{q,n} = \sum_{k=0}^{L-1} h_{qp,k} x_{p,n-k}.$$

Performing a Fourier transform, we have:

$$\tilde{y}_{q,i} = \frac{1}{N} \sum_{n=0}^{N-1} y_{q,n} e^{-j2\pi f_i \frac{n}{N} T_m} = \tilde{h}_{qp,i} \tilde{x}_{p,i}.$$

As long as the rank of matrix \tilde{h}_{qp} is larger than P, an inverse matrix can exist, so we may obtain:

$$\tilde{x}_{p,i} = \text{inv}(\tilde{h}_{qp,i}) \tilde{y}_{q,i},$$

- 5 separating the data stream in the frequency domain. Using an inverse Fourier transform, the waveform $x_{p,n}$ may be reconstructed by:

$$x_{p,n} = \sum_{i=0}^{N-1} \tilde{x}_{p,i} e^{j2\pi f_i \frac{n}{N} T_m},$$

such that SISO techniques may be applied to detect a symbol, synchronize the sample, remove the guard band, and apply a Fourier transform to obtain the message $\tilde{m}_{p,i}$.

- 10 [0023] This technique may not only operate to solve the problem of asynchronous data streams, but can also resolve different frequency offsets between an AP and multiple user stations (since the operations may be independent of frequency offset). After the asynchronous data streams are separated, each stream reception chain can track individual frequency offset for a designated receiver signal path. That is, compensation for
15 frequency offset may be effected individually by processing each data stream according to conventional single user techniques.

- [0024] Thus, the frequency spectra shown for stations USER1, USER2, and USER3 in FIG. 1B illustrate that by converting received signals into the frequency domain, operations may become independent of frequency offset variations. In this case,
20 for example, the frequency spectra are offset by different amounts. However, since the frequency spatial demapper included in some embodiments is able to process the superimposed asynchronous data streams in the frequency domain, for a given frequency f , the frequency spatial demapper can recover the originally sent signals $S_1(f)$, $S_2(f)$, and $S_3(f)$. It should be noted that the frequency f may be located at different places with
25 respect to different users' center frequencies, such that the difference in location reflects the difference in frequency offsets.

- [0025] FIG. 2 is a block diagram of an apparatus 220 and a system 222 according to various embodiments, each of which may operate in the manner described above. For example, an apparatus 220 may comprise a module 226 to separate (e.g., a separation
30 module), in the frequency domain, a combined plurality P of asynchronous data streams

200 received at substantially the same time into a separated plurality of data streams 230. The module 226 may include a spatial demultiplexer 234 (e.g., a frequency spatial demapper, a linear demultiplexer that may implement zero-forcing and minimum mean square error (MMSE) equalization techniques, a nonlinear demultiplexer that may
5 implement Vertical Bell Labs Layered Space-Time (V-BLAST) architecture, etc.) to provide the separated plurality of data streams 230.

[0026] In some embodiments, the module 226 to separate the data streams 230 may include one or more fast Fourier transform (FFT) modules 238 to perform an FFT on the combined plurality P of asynchronous data streams 200, as well as one or more
10 inverse-FFT (IFFT) modules 242 to perform an IFFT on one or more of the separated plurality of data streams 230. The apparatus 220 may also include one or more synchronization modules 250 to receive at least one of the separated plurality of data streams 230 after processing by one or more of the IFFT modules 242. In some
15 embodiments, one or more of the separated plurality of data streams 230 may be formatted according to any of several standards, including an IEEE 802.11 standard and/or an IEEE 802.16 standard. Numerous variations are possible.

[0027] For example, in some embodiments, an apparatus 220 may include one or more FFT modules 238 to perform an FFT on the combined plurality P of asynchronous data streams 200, a spatial demultiplexer 234 to provide a separated plurality of data
20 streams 230 associated with the combined plurality P of asynchronous data streams 200, and one or more IFFT modules 242 to perform an IFFT on at least one of the separated plurality of data streams 230 so as to separate, in the frequency domain, the combined plurality P of asynchronous data streams 200 received at substantially the same time into the separated plurality of data streams 230. One or more of the separated plurality of data
25 streams 230 may include a plurality of OFDM symbols (see FIG. 1A). In some embodiments, the frequency offset associated with a first data stream included in the separated plurality of data streams may be different from the frequency offset associated with a second data stream included in the plurality of separated data streams (see FIG. 1B). Other embodiments may be realized.

[0028] For example, in some embodiments, the data streams may be separated in the frequency domain, where channels are known from training. Then the waveforms of the data streams may be reconstructed in the time domain. Each stream may then be

detected, synchronized, and samples selected without ISI, perhaps using detection and synchronization modules 250. Other embodiments may be realized.

[0029] For example, a system 222 may include an apparatus 220, similar to or identical to that described previously, as well as one or more antennas 264, including a plurality Q of antennas 264 to receive the combined plurality P of asynchronous data streams 200. The antennas 264 may include may different types, including patch, slot, PIFA (planar inverted f-antenna), omnidirectional, directional, monopole, dipole, etc. The antennas 264 may form a portion of a multiple-input, multiple-output (MIMO) system.

[0030] In some embodiments, a wireless access point 268 may be coupled to the plurality Q of antennas 264. The wireless access point 268 may be used to train one or more channels for one or more of a plurality of P users associated with the combined plurality P of asynchronous data streams. The system 222 may also include a processor 270 to form an SDMA $Q \times P$ channel matrix, known to those of skill in the art.

[0031] The asynchronous data streams 100, 200, training phase 102, data phase 104, spatial channels 106, symbols 108, apparatus 220, system 222, modules 226, 238, 242, 246, 250, separated data streams 230, spatial demultiplexer 234, antennas 264, wireless access point 268, processor 270, frequency f , signals $S_1(f)$, $S_2(f)$, $S_3(f)$, and stations STA1, STA2, STA3, USER1, USER2, USER3 may all be characterized as "modules" herein. Such modules may include hardware circuitry, and/or one or more processors and/or memory circuits, software program modules, including objects and collections of objects, and/or firmware, and combinations thereof, as desired by the architect of the apparatus 220 and the system 222, and as appropriate for particular implementations of various embodiments.

[0032] It should also be understood that the apparatus and systems of various embodiments can be used in applications other than wireless access points, and thus, various embodiments are not to be so limited. The illustrations of an apparatus 220 and system 222 are intended to provide a general understanding of the structure of various embodiments, and they are not intended to serve as a complete description of all the elements and features of apparatus and systems that might make use of the structures described herein.

[0033] Applications that may include the novel apparatus and systems of various embodiments include electronic circuitry used in high-speed computers, communication and signal processing circuitry, modems, processor modules, embedded processors, data

switches, and application-specific modules, including multilayer, multi-chip modules. Such apparatus and systems may further be included as sub-components within a variety of electronic systems, such as televisions, cellular telephones, personal computers, personal digital assistants (PDAs), workstations, radios, video players, vehicles, and others.

[0034] Various methods may be embodied by the disclosed techniques. For example, in some embodiments, a wireless access point may train each user's $Q \times 1$ channel (e.g., the first channel for each user), one by one, for all P users, and then a frequency response may be computed for each user's $Q \times 1$ channel. At this point, a $Q \times P$ channel matrix, known to those of skill in the art, may be formed for each frequency tone. The time domain signals of P users from Q antennas may then be converted from the time domain into the frequency domain, segment by segment. The size of a time domain segment may be determined by the sub-carrier spacing of a signal including OFDM symbols. For example, in a signal formatted according to IEEE 802.11a or IEEE 802.11g, the segment may be 3.2 microseconds. The segment can be longer or shorter depending on the channel frequency variation and frequency resolution of the channel training.

[0035] In some embodiments, the P users' signals (or spatial channels) may be separated in the frequency domain, tone by tone, using the previously formed $Q \times P$ channel matrixes and a frequency spatial demapper (e.g., using MMSE and zero-forcing techniques). The separated P signals may then be converted from the frequency domain into the time domain, segment by segment. At this point, the resulting P time domain signals may be synchronized and detected using conventional techniques.

[0036] For example, with respect to synchronization, in a conventional single user IEEE 802.11a system, the receiver may have knowledge of the structures of short preambles and long preambles. It may detect the presence of the short preambles. Then coarse synchronization may be performed at the end of the detection to search for boundaries between short preambles and between the last short preamble and the first long preamble. A coarse frequency offset estimation may also be performed. Thus, at about the same time, the receiver may also estimate the frequency offset between its oscillator clock and that of the transmitter. As noted previously, various embodiments may operate not only to separate asynchronous user signals, but also to separate users having different frequency offsets.

[0037] FIG. 3 is a flow chart illustrating several methods according to various embodiments. In some embodiments of the invention, a method 311 may (optionally) begin with computing a frequency response for a number of channels corresponding to a plurality P of asynchronous data streams at block 321. The method 311 may continue with receiving, at substantially the same time, the combined plurality P of asynchronous data streams at a plurality Q of antennas at block 325. The method 311 may also include converting the combined plurality P of asynchronous data streams from the time domain into the frequency domain at block 327.

[0038] In many embodiments, the method 321 may include separating, in the frequency domain, the combined plurality P of asynchronous data streams received at substantially the same time into a separated plurality of data streams at block 331. In some embodiments, the method 311 may include separating the combined plurality P of asynchronous data streams into the separated plurality of data streams in the frequency domain using a frequency spatial demapper at block 337. It should be noted that it is possible for the number of the separated plurality of data streams to correspond directly to the number of wireless channels. One or more of the separated plurality of data streams may be formatted according to an IEEE 802.11 Standard. Separation may be performed by a wireless access point.

[0039] In some embodiments, the method 311 may include converting the separated plurality of data streams in the frequency domain into a separated plurality of data streams in the time domain at block 341. The method 311 may continue with detecting the separated data streams at block 345, and then synchronizing one or more of the separated plurality of data streams in the time domain at block 351. In some embodiments, the method 311 may include performing a coarse synchronization of at least one of the separated plurality of data streams after detecting the presence of a short preamble at block 357. At about the same time, a coarse frequency offset estimation may also be performed.

[0040] It should be noted that the methods described herein do not have to be executed in the order described, or in any particular order. Moreover, various activities described with respect to the methods identified herein can be executed in serial or parallel fashion. For the purposes of this document, the terms "information" and "data" may be used interchangeably. Information, including parameters, commands, operands, and other data, can be sent and received in the form of one or more carrier waves.

[0041] Upon reading and comprehending the content of this disclosure, one of ordinary skill in the art will understand the manner in which a software program can be launched from a computer-readable medium in a computer-based system to execute the functions defined in the software program. One of ordinary skill in the art will further understand the various programming languages that may be employed to create one or more software programs designed to implement and perform the methods disclosed herein. The programs may be structured in an object-orientated format using an object-oriented language such as Java or C++. Alternatively, the programs can be structured in a procedure-orientated format using a procedural language, such as assembly or C. The software components may communicate using any of a number of mechanisms well-known to those skilled in the art, such as application program interfaces or inter-process communication techniques, including remote procedure calls. The teachings of various embodiments are not limited to any particular programming language or environment. Thus, other embodiments may be realized, as shown in FIG. 4.

[0042] FIG. 4 is a block diagram of an article 485 according to various embodiments, such as a computer, a memory system, a magnetic or optical disk, some other storage device, and/or any type of electronic device or system. The article 485 may comprise a processor 487 coupled to a machine-accessible medium such as a memory 489 (e.g., a memory including an electrical, optical, or electromagnetic conductor) having associated information 491 (e.g., computer program instructions, and/or other data), which when accessed, results in a machine (e.g., the processor 487) performing such actions as separating, in the frequency domain, a combined plurality P of asynchronous data streams received at substantially the same time into a separated plurality of data streams. The activity of separating may be performed by a wireless access point.

[0043] Other activities may include computing a frequency response for a number of channels corresponding to the plurality P of asynchronous data streams. In some embodiments, further activities may include converting the separated plurality of data streams in the frequency domain into a separated plurality of data streams in the time domain, as well as performing a coarse synchronization of at least one of the separated plurality of data streams after detecting the presence of a short preamble. At about the same time, a coarse frequency offset estimation may be performed.

[0044] Implementing the apparatus, systems, and methods described herein may result in providing an operational SDMA uplink when transmitting stations are not

synchronized, or when the accuracy of synchronization is on the order of the CP time interval. Signals having different frequency and/or phase offsets may also be processed in a more reliable fashion. Less power may be required since there may be no need to synchronize clocks with high accuracy. At the same time, WLAN throughput may be increased by enabling transmission for multiple stations and reception with access points on a substantially simultaneous basis.

[0045] Although the inventive concept may be discussed in the exemplary context of an IEEE 802.11x implementation (e.g., IEEE 802.11a, IEEE 802.11g, IEEE 802.11 HT, etc.), the claims are not so limited. Indeed, embodiments of the present invention may well be implemented as part of any wireless system, including those conforming to various versions of the IEEE 802.16 standards, and/or using multi-carrier wireless communication channels (e.g., orthogonal frequency-division multiplexing (OFDM), discrete multi-tone modulation (DMT), etc.), such as may be used within, without limitation, a wireless personal area network (WPAN), a wireless local area network (WLAN), a wireless metropolitan area network (WMAN), a wireless wide area network (WWAN), a cellular network, a third generation (3G) network, a fourth generation (4G) network, a universal mobile telephone system (UMTS), and the like communication systems.

[0046] The accompanying drawings that form a part hereof show by way of illustration, and not of limitation, specific embodiments in which the subject matter may be practiced. The embodiments illustrated are described in sufficient detail to enable those skilled in the art to practice the teachings disclosed herein. Other embodiments may be utilized and derived therefrom, such that structural and logical substitutions and changes may be made without departing from the scope of this disclosure. This Detailed Description, therefore, is not to be taken in a limiting sense, and the scope of various embodiments is defined only by the appended claims, along with the full range of equivalents to which such claims are entitled.

[0047] Such embodiments of the inventive subject matter may be referred to herein, individually and/or collectively, by the term "invention" merely for convenience and without intending to voluntarily limit the scope of this application to any single invention or inventive concept if more than one is in fact disclosed. Thus, although specific embodiments have been illustrated and described herein, it should be appreciated that any arrangement calculated to achieve the same purpose may be substituted for the specific embodiments shown. This disclosure is intended to cover any and all adaptations or

variations of various embodiments. Combinations of the above embodiments, and other embodiments not specifically described herein, will be apparent to those of skill in the art upon reviewing the above description.

[0048] The Abstract of the Disclosure is provided to comply with 37 C.F.R.

5 §1.72(b), requiring an abstract that will allow the reader to quickly ascertain the nature of the technical disclosure. It is submitted with the understanding that it will not be used to interpret or limit the scope or meaning of the claims. In addition, in the foregoing Detailed Description, it can be seen that various features are grouped together in a single embodiment for the purpose of streamlining the disclosure. This method of disclosure is
10 not to be interpreted as reflecting an intention that the claimed embodiments require more features than are expressly recited in each claim. Rather, as the following claims reflect, inventive subject matter lies in less than all features of a single disclosed embodiment. Thus the following claims are hereby incorporated into the Detailed Description, with each claim standing on its own as a separate embodiment.

CLAIMS

What is claimed is:

1. A method, including:
separating, in a frequency domain, a combined plurality P of asynchronous data streams received at substantially a same time into a separated plurality of data streams.
- 5 2. The method of claim 1, further including:
converting the combined plurality P of asynchronous data streams from a time domain into the frequency domain prior to the separating.
3. The method of claim 1, further including:
receiving, at substantially the same time, the combined plurality P of asynchronous
10 data streams at a plurality Q of antennas.
4. The method of claim 1, further including:
separating the combined plurality P of asynchronous data streams into the separated plurality of data streams in the frequency domain using a frequency spatial demapper.
- 15 5. The method of claim 1, wherein the separated plurality of data streams correspond directly to a number of wireless channels.
6. The method of claim 1, wherein at least one of the separated plurality of data streams is formatted according to one of an Institute of Electrical and Electronics Engineers 802.11 standard and an Institute of Electrical and Electronics Engineers
20 802.16 standard.

7. The method of claim 1, further including:
synchronizing at least one of the separated plurality of data streams in the time domain.
- 5 8. An article including a machine-accessible medium having associated information, wherein the information, when accessed, results in a machine performing:
separating, in a frequency domain, a combined plurality P of asynchronous data streams received at substantially a same time into a separated plurality of data streams.
9. The article of claim 8, wherein the separating is performed by a wireless access point.
- 10 10. The article of claim 8, wherein the information, when accessed, results in the machine performing:
computing a frequency response for a number of channels corresponding to the plurality P of asynchronous data streams.
11. The article of claim 8, wherein the information, when accessed, results in the machine performing:
15 converting the separated plurality of data streams in the frequency domain into a separated plurality of data streams in the time domain.
12. The article of claim 8, wherein the information, when accessed, results in the machine performing:
20 synchronizing at least one of the separated plurality of data streams after detecting a presence of a short preamble.
13. The article of claim 12, wherein the information, when accessed, results in the machine performing:
estimating a coarse frequency offset.
- 25 14. An apparatus, including:

a module to separate, in a frequency domain, a combined plurality P of asynchronous data streams received at substantially a same time into a separated plurality of data streams.

5 15. The apparatus of claim 14, wherein the module to separate further includes:
a spatial demultiplexer to provide the separated plurality of data streams.

16. The apparatus of claim 14, wherein the module to separate further includes:
a module to perform a fast Fourier transform on the combined plurality P of asynchronous data streams; and
a module to perform an inverse fast Fourier transform on at least one of the
10 separated plurality of data streams.

17. The apparatus of claim 14, further including:
a synchronization module to receive at least one of the separated plurality of data streams after processing by a module capable of performing an inverse fast Fourier transform.

15 18. The apparatus of claim 14, wherein at least one of the separated plurality of data streams is formatted according to one of an Institute of Electrical and Electronics Engineers 802.11 standard and an Institute of Electrical and Electronics Engineers 802.16 standard.

19. An apparatus, including:
20 a module to perform a fast Fourier transform on a combined plurality P of asynchronous data streams;
a spatial demultiplexer to provide a separated plurality of data streams associated with the combined plurality P of asynchronous data streams; and
a module to perform an inverse fast Fourier transform on at least one of the
25 separated plurality of data streams so as to separate, in a frequency domain, the combined plurality P of asynchronous data streams received at substantially a same time into the separated plurality of data streams.

20. The apparatus of claim 19, wherein at least some of the separated plurality of data streams include a plurality of orthogonal frequency division multiplexed symbols.

21. The apparatus of claim 19, wherein a frequency offset associated with a first data stream included in the separated plurality of data streams is different than a frequency
5 offset associated with a second data stream included in the plurality of separated data streams.

22. A system, including:
a module to separate, in a frequency domain, a combined plurality P of
asynchronous data streams received at substantially a same time into a separated
10 plurality of data streams; and
a plurality Q of antennas to receive the combined plurality P of asynchronous data streams.

23. The system of claim 22, wherein the plurality Q of antennas form a portion of a multiple-input, multiple-output (MIMO) system.

15 24. The system of claim 22, further including:
a wireless access point coupled to the plurality Q of antennas.

25. The system of claim 24, wherein the wireless access point is to train at least one channel for at least some of a plurality of P users associated with the combined plurality P of asynchronous data streams.

20 26. The system of claim 22, further including:
a processor to form a $Q \times P$ channel matrix.

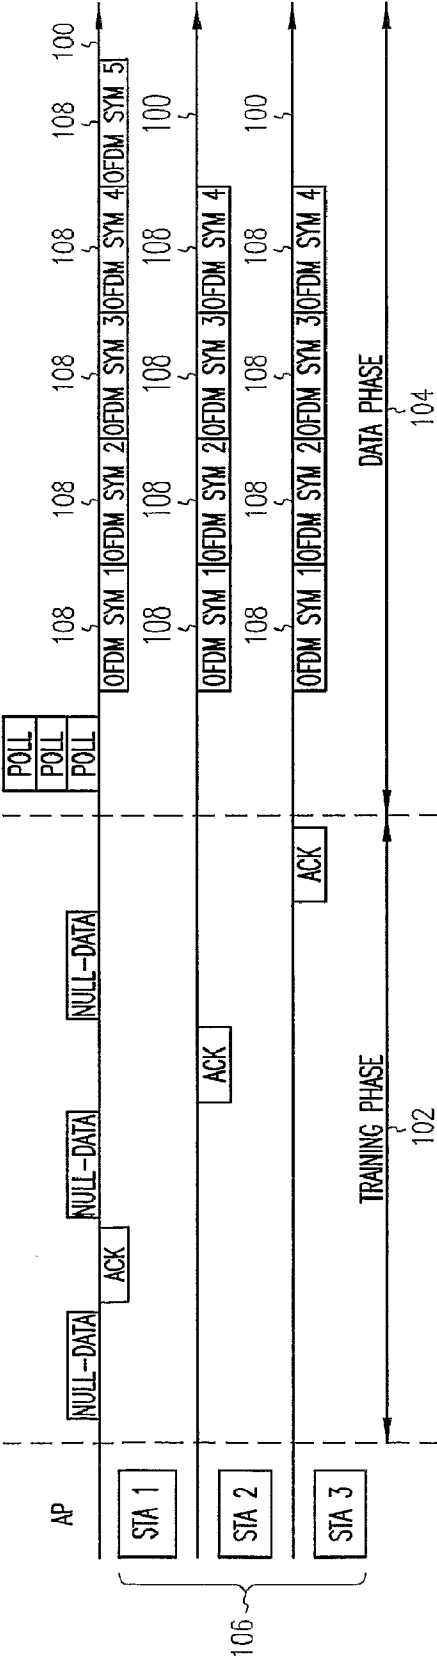


FIG. 1A

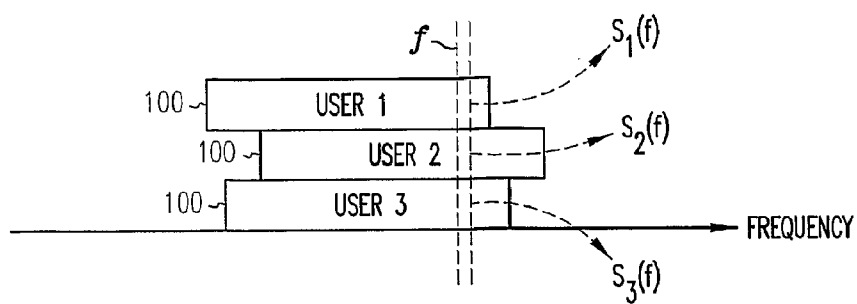


FIG. 1B

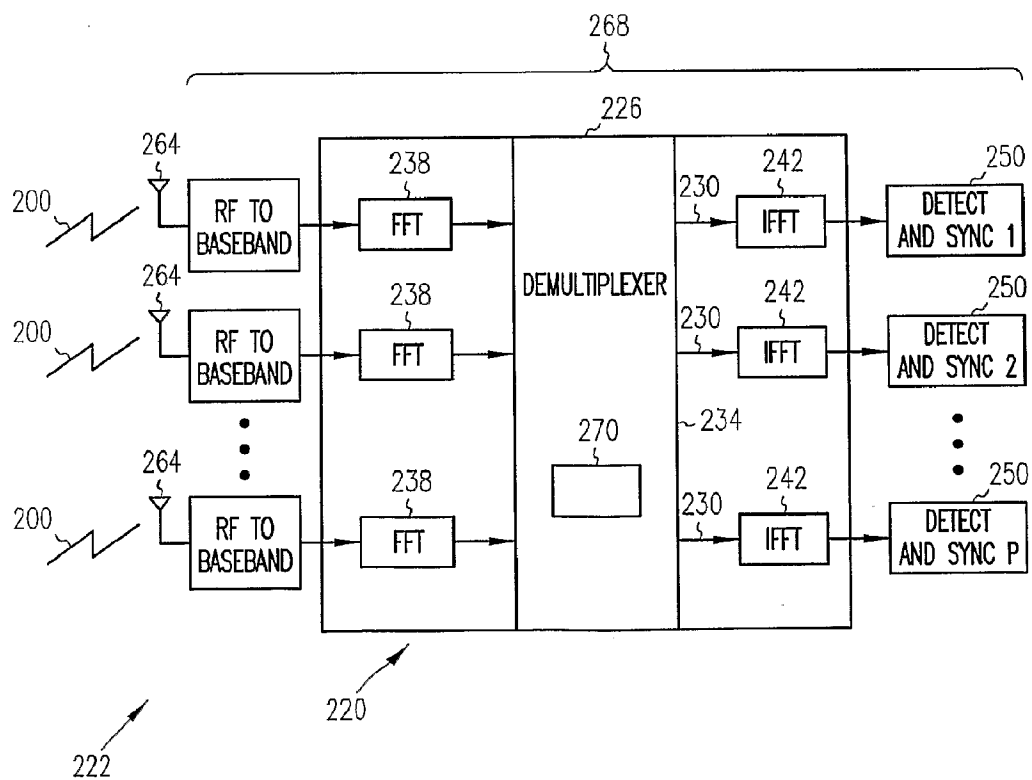


FIG. 2

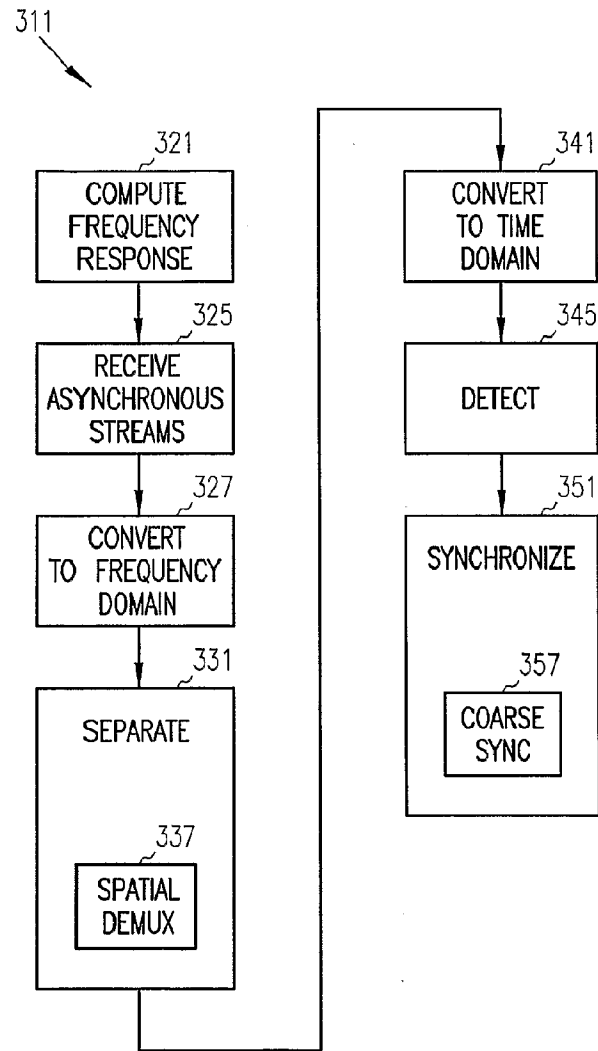


FIG. 3

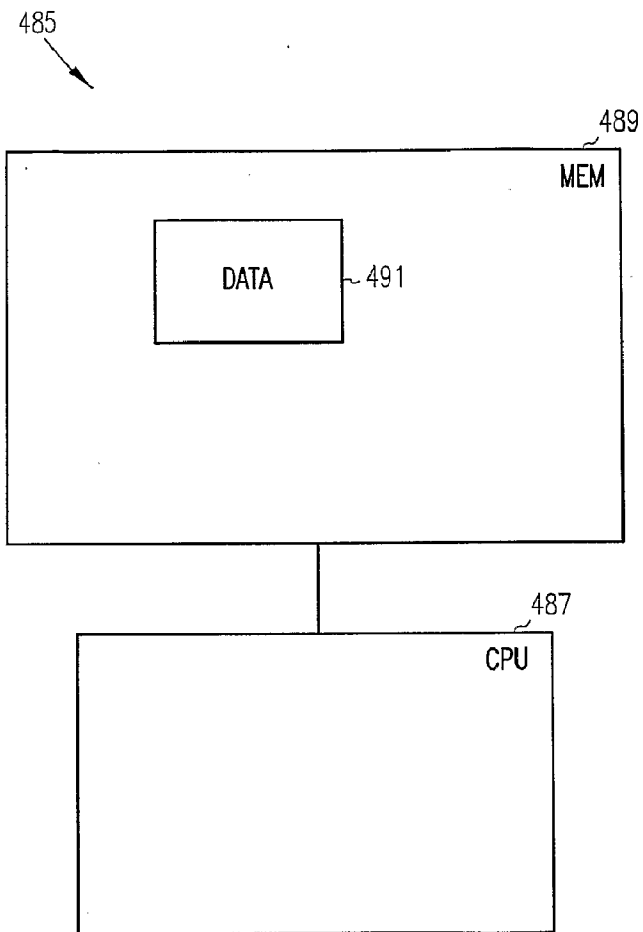


FIG. 4

INTERNATIONAL SEARCH REPORT

Intern I Application No
PCT/US2005/010136

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 H04L27/26 H04L1/06 H04L5/02		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 7 H04L		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal, WPI Data, PAJ, INSPEC		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2003/231700 A1 (ALAMOUTI SIAVASH ET AL) 18 December 2003 (2003-12-18) paragraph '0151! - paragraph '0153! paragraph '0216! paragraph '0575! - paragraph '0579! paragraph '0593! -----	1-26
X	BURG A ET AL: "Low complexity frequency domain equalization of MIMO channels with applications to MIMO-CDMA systems" VEHICULAR TECHNOLOGY CONFERENCE, 2003. VTC 2003-FALL. 2003 IEEE 58TH ORLANDO, FL, USA 6-9 OCT. 2003, PISCATAWAY, NJ, USA, IEEE, US, 6 October 2003 (2003-10-06), pages 468-472Vc11, XP010700890 ISBN: 0-7803-7954-3 section II.A section III.B ----- -/--	1-26
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C.		
<input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents : 'A' document defining the general state of the art which is not considered to be of particular relevance 'E' earlier document but published on or after the international filing date 'L' document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) 'O' document referring to an oral disclosure, use, exhibition or other means 'P' document published prior to the international filing date but later than the priority date claimed 'T' later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention 'X' document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone 'Y' document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. '*' document member of the same patent family		
Date of the actual completion of the International search		Date of mailing of the International search report
21 July 2005		29/07/2005
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer Orozco Roura, C

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2005/010136

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	OGAWA Y ET AL: "A MIMO-OFDM system for high-speed transmission" VEHICULAR TECHNOLOGY CONFERENCE, 2003. VTC 2003-FALL. 2003 IEEE 58TH ORLANDO, FL, USA 6-9 OCT. 2003, PISCATAWAY, NJ, USA, IEEE, US, 6 October 2003 (2003-10-06), pages 493-497Vol1, XP010700945 ISBN: 0-7803-7954-3 page 493 figure 3	1-26
X	SONGPING WU ET AL: "Multiple Phase Noise Correction for OFDM/SDMA" GLOBECOM'03. 2003 - IEEE GLOBAL TELECOMMUNICATIONS CONFERENCE. CONFERENCE PROCEEDINGS. SAN FRANCISCO, DEC. 1 - 5, 2003, IEEE GLOBAL TELECOMMUNICATIONS CONFERENCE, NEW YORK, NY : IEEE, US, vol. VOL. 7 OF 7, 1 December 2003 (2003-12-01), pages 1311-1315, XP010677507 ISBN: 0-7803-7974-8 section I figure 1	1-26

INTERNATIONAL SEARCH REPORT
nation on patent family members

Intern Application No
PCT/US2005/010136

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003231700 A1	18-12-2003	US 2002159506 A1	31-10-2002
		US 6600776 B1	29-07-2003
		US 2005002440 A1	06-01-2005
		WO 9837654 A2	27-08-1998
<hr/>			